


Gate Pad Information Sheet

General explanation: Mesh fences are tensioned systems, they rely on the tension to keep the fence safe and aesthetically pleasing. Because the self closing, self latching gate must hit the same spot every time in order to self latch, the gate must be installed on solid ground so the gate post does not move when the gate is opened. It's for this reason that if our customers' desired gate placement is not in a concrete, paver, and natural stone decks, a gate pad must be made to accommodate the gate. All-Safe can install the gate pad for our customers, but often our customers will opt to install the gate pad themselves or have their contractor install it. If that is the case, the pad must be made to below specifications.

Is there an advantage to having All-Safe install your gate pad? Yes, if you decide to have All-Safe install your gate pad, we will remake your gate pad if it were to break in the process of drilling holes for the gate.

What happens if you install your own gate pad and it breaks during the installation? A new one will have to be made at the customer's expense. We use top of the line core drills and our Installers are factory training, full time employees, so if the pad is made to the below specifications it is unlikely to break or crack while drilling. However because All-Safe did not make the pad, we cannot guarantee its quality.

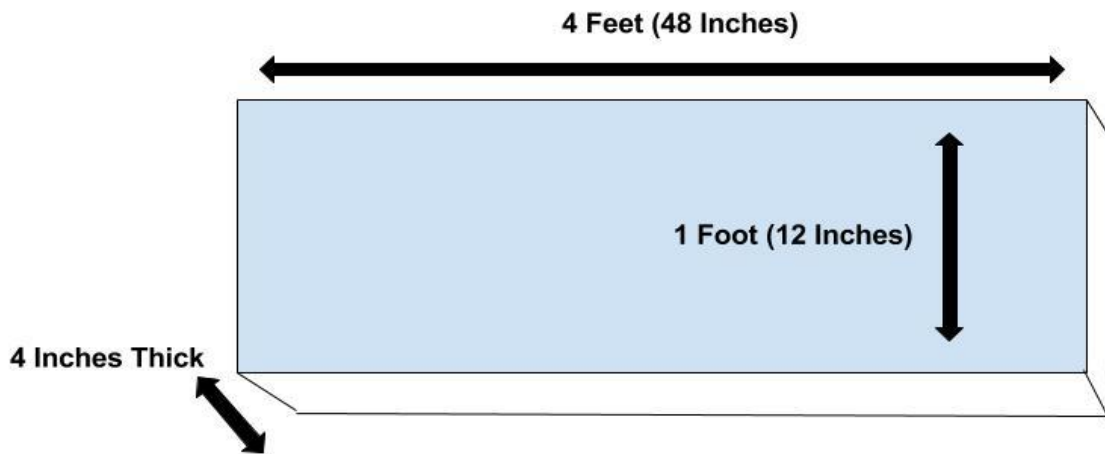

Gate pad needs to be formed "patio quality" pad and rebar can be added for strength



The gate pad grade or height should be set to the grade or height the fence will be set to. The customer is responsible for final gate pad placement.

